

OUR CLEANBURN RANGE OF STOVES
BRINGS THE COOL, MINIMALIST
ELEGANCE OF SIMPLE SCANDINAVIAN
STYLE INTO YOUR HOME.

A sleek fusion of style and efficiency, the Cleanburn range combines the best of Norwegian and Swedish design with our innovative, user-friendly technology. From the home of classic wood-burners comes this stunning range of traditional convection and radiant stoves, bringing a touch of Scandinavian class to your home.

10 WARRANTY



LØVENHULM	
LØVENHOLM EURO	
NØRRESKOVEN	



THE LØVENHOLM IS A BEAUTIFULLY DESIGNED SCANDINAVIAN-STYLE STOVE, WHICH EMBRACES OUR LONG HISTORY OF TRADITIONAL WOOD-BURNER MANUFACTURING.

This high-performance model delivers an impressive heat output with exceptionally low emissions. The Løvenholm is one of the few stoves $% \left(1\right) =\left\{ 1\right\} =\left\{ 1\right\}$ in Britain to pass the Norwegian Standard, one of the most stringent emissions tests in the world.







NO AIR BRICK REQUIRED 5" FLUE COLLAR TRIPLEBURN® TECHNOLOGY HOT AIR WASH SYSTEM

DEFRA APPROVED

/ DOUBLE DOOR

/ MULTIFUEL / BLACK HANDLE

/ SINGLE DOOR / MULTIFUEL / BLACK HANDLE / SINGLE DOOR / WOOD / BLACK HANDLE CAN BE FITTED ON A 12mm HEARTH

HEAT OUTPUT

3kW TO 5kW NOMINAL

4.6kW



WITH CREDENTIALS THAT MEET EUROPE'S
STRICTEST ECO-STANDARDS, THE LØVENHOLM
EURO IS A MODERN TWIST ON OUR BEST-SELLING
LØVENHOLM TRADITIONAL MODEL.

Designed to provide a clean, environmentally-conscious performance, the Løvenholm Euro combines sleek lines and minimalist looks to make it the perfect complement for contemporary homes.

The seamless legs house a stylish log store, ensuring your stove is always fully stocked.







/ SINGLE DOOR / MULTIFUEL / BLACK HANDLE DEFRA APPROVED

NO AIR BRICK REQUIRED

5" FLUE COLLAR

TRIPLEBURN® TECHNOLOGY

HOT AIR WASH SYSTEM

CAN BE FITTED ON A 12mm HEARTH

HEAT OUTPUT 3kW TO 5kW NOMINAL 4.6kW

. 1311) L M

E U R



THE NØRRESKOVEN UNITES CLASSIC, TRADITIONAL STOVE DESIGN WITH FUTURE-PROOF TECHNOLOGY. THIS CONVECTION STOVE CAN BE FILLED WITH SEASONED LOGS, AND THANKS TO TRIPLEBURN® TECHNOLOGY, GUARANTEES TO DELIVER EFFICIENT OUTPUT EVERY SINGLE TIME.

The heat output range of this stove is sufficient enough for family rooms and burns evenly at an adjustable pace, meaning this classically styled stove is perfect for any home.







DEFRA APPROVED NO AIR BRICK REQUIRED

5" FLUE COLLAR

TRIPLEBURN® TECHNOLOGY

HOT AIRWASH SYSTEM

CAN BE FITTED ON A 12mm HEARTH

CONVECTION STOVE

HEAT SHIELD

/ DOUBLE DOOR

/ MULTIFUEL
/ STAINLESS HANDLE

/ SINGLE DOOR / STAINLESS HANDLE

/ SINGLE DOOR / MULTIFUEL
/ STAINLESS HANDLE

HEAT OUTPUT 4kW TO 6kW NOMINAL

4.6kW



ELEGANTLY SLENDER WITH SLEEK STAINLESS STEEL FIXTURES, THIS STOVE IS DESIGNED FOR IMPACT WITHOUT BEING OBTRUSIVE. THE NØRRESKOVEN EURO IS PERFECT FOR MODERN AND MINIMALIST INTERIORS.

The Euro is built from steel to ensure it heats up quickly, making this stove perfect for the heart of any living room.







/ SINGLE DOOR / MULTIFUEL / STAINLESS HANDLE DEFRA APPROVED

NO AIR BRICK REQUIRED

5" FLUE COLLAR

TRIPLEBURN® TECHNOLOGY

HOT AIRWASH SYSTEM

CAN BE FITTED ON A 12mm HEARTH

CONVECTION STOVE

HEAT SHIELD


HEAT OUTPUT

4kW TO 6kW NOMINAL

EN R O

11

4.6kW

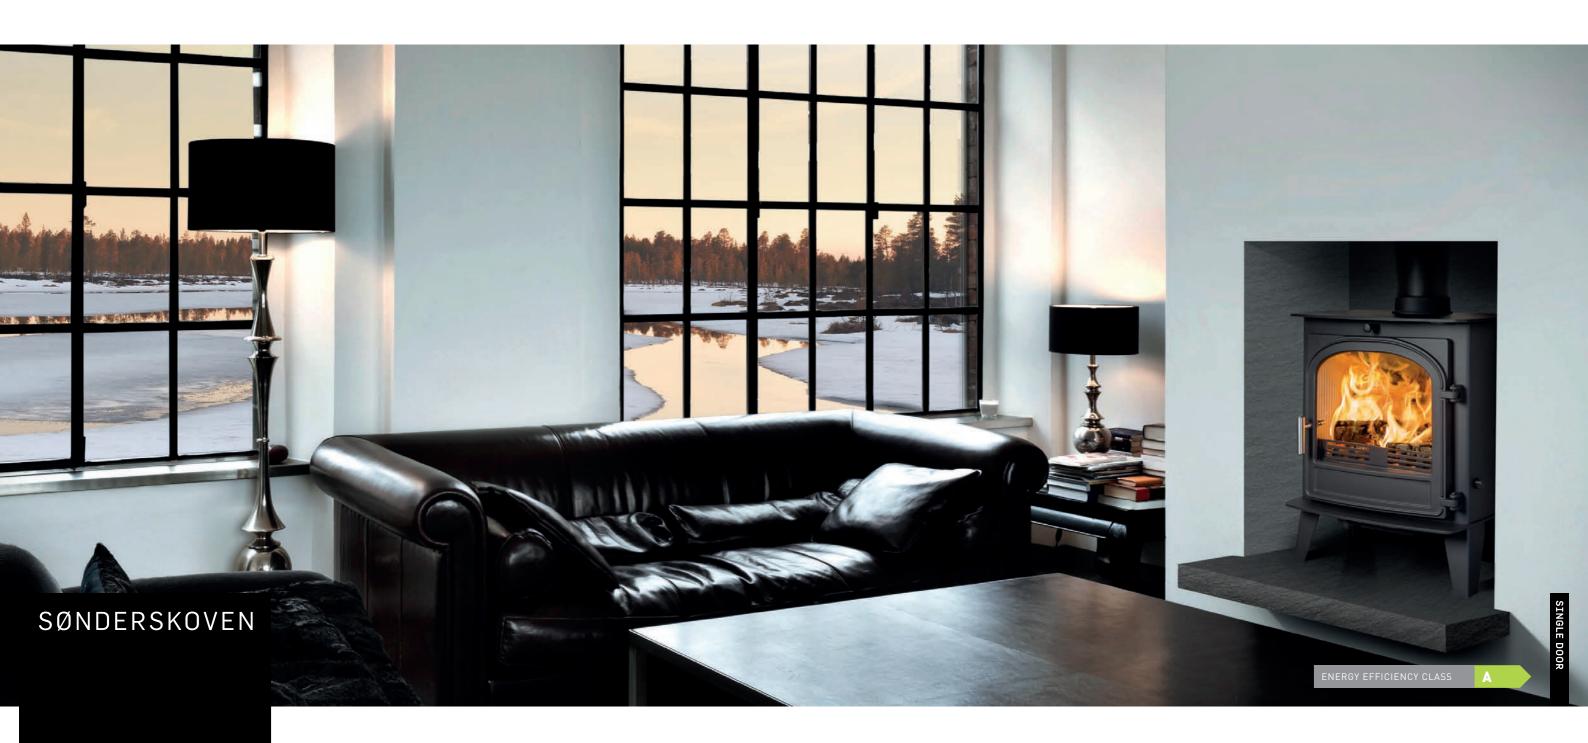

SØN DER SKO THE SØNDERSKOVEN TRADITIONAL IS ONE OF OUR BIGGEST MODELS, BOASTING IMPRESSIVE HEAT OUTPUT THROUGH INNOVATIVE TRIPLEBURN® PERFORMANCE.

The air sliders allow you to easily adjust heat levels and maintain a comfortable temperature. This family-sized stove is perfect for large or open-plan spaces.



/ SINGLE DOOR / MULTIFUEL / STAINLESS HANDLE TRIPLEBURN® TECHNOLOGY

HOT AIRWASH SYSTEM

LARGE VIEWING WINDOW

HIGH OUTPUT

CAN BE FITTED ON A 12mm HEARTH

CONVECTION STOVE

HEAT OUTPUT 7kW TO 10kW NOMINAL 7.4kW



MATCHING SOPHISTICATED DESIGN WITH THE HIGHEST LEVELS OF EFFICIENCY, THE SKAGEN 5 IS PACKED WITH GREAT FEATURES.

As well as having a 5" flue collar, the 4.9kW heat output of the Skagen 5 does not require an air brick. A built-in dynamic control cassette also allows the temperature to be easily maintained.

Combining our Tripleburn® technology and hot air wash system, the Skagen 5 is also DEFRA approved for the Clean Air Act.





- / SINGLE DOOR / WOOD
- / WOUD / STAINLESS HANDLE
- / SINGLE DOOR
 / MULTIFUEL (RIDDLING
 BARS OR STATIC GRATE)
 / STAINLESS HANDLE

DEFRA APPROVED

NO AIR BRICK REQUIRED

5" FLUE COLLAR

TRIPLEBURN® TECHNOLOGY

HOT AIRWASH SYSTEM

DIRECT AIR OPTION

DYNAMIC CONTROL PANEL

CAN BE FITTED ON A 12mm HEARTH
CONVECTION STOVE

GOOD CLEARANCE TO COMBUSTIBLE DISTANCE

EAT OUTPUT 4kW TO 8kW NOMINAL 4.9kW

HEAT OUTPUT 4kW TO 8kW



ADAPTABLE AND INTUITIVE WITH AN INNOVATIVE
AIRFLOW PANEL, THE SKAGEN 6 PUTS INSTANT CONTROL
AT YOUR FINGERTIPS.

This family stove has an output of up to 9kW, while utilising our Tripleburn® technology to maximise fuel efficiency. A choice between wood or other approved solid fuels allows you to optimise your heating system.



/ SINGLE DOOR / MULTIFUEL / STAINLESS HANDLE DEFRA APPROVED

TRIPLEBURN® TECHNOLOGY

6" FLUE COLLAR

HOT AIRWASH SYSTEM

DIRECT AIR OPTION

DYNAMIC CONTROL PANEL

CAN BE FITTED ON A 12mm HEARTH

CONVECTION STOVE

GOOD CLEARANCE TO COMBUSTIBLE DISTANCE

HEAT OUTPUT 5kW TO 9kW NOMINAL 6kW



THE DEFRA APPROVED NORDSTRAND 5 PORCELAIN IS A TRADITIONAL, CAST IRON, NORWEGIAN-STYLE STOVE WITH A PORCELAIN ENAMEL FINISH.

The controls allow the heat to be perfectly maintained to the temperature you want using our Tripleburn $^{\scriptsize @}$ technology. This stove flawlessly matches a contemporary style with advanced technology, without compromising on the ecological impact.



/ SINGLE DOOR / WOOD

/ STAINLESS HANDLE / PORCELAIN ENAMEL

HOT AIRWASH SYSTEM NO AIR BRICK REQUIRED 5" FLUE COLLAR DYNAMIC CONTROL PANEL CAST IRON ENAMEL FINISH DIRECT AIR OPTION MULTIFUEL OPTION

TRIPLEBURN® TECHNOLOGY

4.9kW HEAT OUTPUT 4kW TO 8kW NOMINAL



BOASTING CLASSIC NORWEGIAN ELEGANCE AND INTUITIVE USER CONTROLS, THIS TRADITIONAL CAST IRON STOVE WITH ENAMEL FINISH EFFORTLESSLY COMBINES SCIENCE WITH STYLE.

With its charming blue-black finish, the Nordstrand 5 Satin Blue will make an eye-catching feature in your home. Its heat output can be easily adjusted with the turn of a dial, and just like the other Nordstrand models, it is DEFRA approved for use in smoke control areas.



/ SINGLE DOOR / WOOD

/ STAINLESS HANDLE / SATIN BLUE ENAMEL

HOT AIRWASH SYSTEM NO AIR BRICK REQUIRED 5" FLUE COLLAR DYNAMIC CONTROL PANEL CAST IRON **ENAMEL FINISH** DIRECT AIR OPTION MULTIFUEL OPTION

TRIPLEBURN® TECHNOLOGY

4.9kW HEAT OUTPUT 4kW TO 8kW NOMINAL



THIS CAST IRON, DEFRA APPROVED APPLIANCE IS A MODERN STOVE IN A TRADITIONAL SHELL.

The Nordstrand 5's dynamic controls allow you to fully adjust its heat output with the simple turn of a knob, while its cast iron body will radiate heat long after the flames have gone out.



/ SINGLE DOOR

/ MULTIFUEL
/ STAINLESS HANDLE
/ BLACK PAINT

TRIPLEBURN® TECHNOLOGY HOT AIRWASH SYSTEM NO AIR BRICK REQUIRED 5" FLUE COLLAR DYNAMIC CONTROL PANEL CAST IRON DIRECT AIR OPTION MULTIFUEL OPTION

HEAT OUTPUT 4kW TO 8kW NOMINAL 4.9kW



THIS BEAUTIFULLY SLEEK, CURVED STOVE IS THE EPITOME OF MODERN DESIGN.

Perfect for contemporary homes, this elegant cylindrical stove will wow friends and family alike. It's not all about looks though - subtle sliders on the front of the stove are used to adjust the heat output, putting control at your fingertips.



/ MULTIFUEL / HIDDEN HANDLE / BLACK PAINT DEFRA APPROVED

REAR TO COMBUSTIBLE DISTANCE 15mm

HOT AIRWASH SYSTEM

NO AIR BRICK REQUIRED

5" FLUE COLLAR

CAN BE FITTED ON A 12mm HEARTH

DIRECT AIR OPTION

CONVECTION STOVE

HEAT OUTPUT 3kW TO 7kW NOMINAL 4.7kW

TAD



WHERE ATTENTION TO DETAIL, DESIGN AND PERFORMANCE MEET. THE STRÖMSTAD SJU AND ATTA OFFER EASY-TO-USE CONTROLS AND ARE HIGHLY RESPONSIVE TO HEAT OUTPUT ADJUSTMENTS.

The Strömstad Sju is the shortest Strömstad model. It offers Tripleburn® technology for the highest standard of performance, while the futuristic design – with a hidden handle – displays top of the range Cleanburn design.

The Strömstad Atta incorporates a log store into the cylindrical body, giving it all of the features of a modern Scandinavian stove.





/ MULTIFUEL

/ HIDDEN HANDLE / BLACK PAINT

ATTA

TRIPLEBURN® TECHNOLOGY

DEFRA APPROVED REAR TO COMBUSTIBLE DISTANCE 15mm HOT AIRWASH SYSTEM NO AIR BRICK REQUIRED 5" FLUE COLLAR CAN BE FITTED ON A 12mm HEARTH DIRECT AIR OPTION (ATTA ONLY) CONVECTION STOVE

4.7kW HEAT OUTPUT 3kW TO 7kW NOMINAL

CLEANBURN /FEATURES

FEA TUF ES

	LØVENHOLM MODELS	NØRRESKOVEN MODELS	SØNDERSKOVEN MODELS	SKAGEN 5	SKAGEN 6	NORDSTRAND 5 MODELS	STRÖMSTAD MODELS
HEAT OUTPUT RANGE (kW)	3-5	4-6	7-10	4-8	5-9	4-8	3-7
NOMINAL HEAT OUTPUT (kW)	4.6	4.6	7.4	4.9	6	4.9	4.7
EFFICIENCY ON WOOD (%)	75	73	79	80	79	83	78
EMISSIONS (CO. %)	0.19	0.17	0.52	0.15	0.18	0.37	0.23
AIR BRICK REQUIRED (mm²)	No	No	Yes (1320)	No	Yes (550)	No	No
MINIMUM HEARTH THICKNESS (mm)	Freestanding: 12* Recessed: 125	Freestanding: 12* Recessed: 125	Freestanding: 12 Recessed: 125	Freestanding: 12 Recessed: 125	Freestanding: 12 Recessed: 125	Freestanding: 12 Recessed: 125	Freestanding: 12 Recessed: 125
DEFRA APPROVED	Yes*	Yes*	No	Yes	Yes	Yes	Yes
DIRECT AIR KIT AVAILABLE	NA	NA	NA	Yes	Yes	NA	Yes (ATTA only)
MULTIFUEL	Standard	Standard	Standard	Standard	Standard	Option	Standard
VOODBURNING	Option	Option	NA	NA	NA	Standard	NA
OG LENGTH (mm)	300	320	420	400	400	400	250
CLEARANCE DISTANCES TO COMBUSTIBLE MATERIALS (mm)**	Rear: 600 Sides: 450	Rear: 450 Sides: 400	Rear: 700 Sides: 450	Rear: 250 Sides: 200	Rear: 250 Sides: 200	Rear: 700 Sides: 700	Rear: 15*** Sides: 180***
CLEARANCE DISTANCES TO NON-COMBUSTIBLES MATERIALS (mm)**	Rear: 50 Sides: 50 Above: 150	Rear: 50 Sides: 150					
SINGLE DOOR	Standard	Standard	Standard	Standard	Standard	Standard	Standard
DOUBLE DOOR	Option*	Option*	Option	NA	NA	NA	NA
BLACK KNOB SET	Standard	NA	NA	NA	NA	NA	NA
STAINLESS KNOB SET	NA	Standard	Standard	Standard	Standard	Standard	NA

^{*} Løvenholm and Nørreskoven wood burning models are not available with double doors

CONTACT YOUR DEALER FOR INSTALLATION ADVICE

10YR /WARRANTY

Cleanburn authorised dealers provide an extended 10 year warranty.

For full warranty specifications and terms and a list of authorised stockists, please visit www.hunterstoves.co.uk

NORWEGIAN /STANDARD

The Norwegian Standard is probably the most stringent emissions standard in the world. The issuing organisation, Standards Norway, works with bodies like ISO to draft new standards that challenge manufacturers to improve quality and safety - and our engineers like a challenge.

As a result, the Løvenholm is one of the few stoves in Britain to pass the test.



A number of the stoves in the Cleanburn range are also approved by DEFRA, the Department for the Environment, Food & Rural Affairs.

This means that the Løvenholm, Nørreskoven, Skagen, Nordstrand and Strömstad models are permitted for use in Smoke Control areas as levels of particle emission are so low.

NOMINAL /OUTPUT

Nominal output is a reasonable heat output that should be achievable without over firing the unit.

Under specific test conditions, the independent test laboratory operate the stove at less than optimum conditions to replicate customer use.

and cannot be installed on a 12mm hearth when freestanding.

** Distances when installed with a twin walled flue (with the addition of the heat shield with the Strömstad).

^{***} Only applicable when freestanding.

TRIPLEBURN® /TECHNOLOGY

OUR TRIPLEBURN® TECHNOLOGY INVOLVES THE USE OF THREE STREAMS OF AIR TO MAXIMISE COMBUSTION.

Air is drawn in beneath the fuel, above the fuel (passing in front of the glass door) and behind the fuel. This hot air improves ignition, meaning that the wood or smokeless fuel is burned more efficiently.

This efficiency means you'll get a better performance from less fuel, so you can heat your living space for less than other options might cost. This also translates to a cleaner atmosphere as there is less carbon monoxide and hydrocarbon travelling up the chimney, making Tripleburn® both economical and environmentally friendly.

DYNAMIC CONTROL

Dynamic Control is an intuitive innovation which gives the user complete control over the temperature output.



30





NØRRESKOVEN / AIR FLOW



SØNDERSKOVEN / AIR FLOW



SKAGEN + NORDSTRAND / AIR FLOW



STRÖMSTAD / AIR FLOW



OPTIONAL / FLUE GATHER BOX

For rear flue installations with limited space.

OPTIONS

OPTIONAL / DIRECT AIR

in airtight buildings.

With the direct air kit fitted the stove is able to take air externally instead of internally. This is particularly necessary

OPTIONAL / FRONT EXTENSION

This front extension enables you to place more fuel into your stove to aid with overnight burning.

OPTIONAL / FUEL DAMPER

This allows a greater controllability on the flue draw (not always necessary).

OPTIONAL / FLUE PIPE

We supply various lengths and options of flue pipe.

31

This means that unlike other stoves, the output is instantly responsive. The user can alter the simplest of dials and the output changes are instantaneous.

OPTIMUM SOLID FUEL **BURNING CONDITIONS***

When burning smokeless fuel, the grate is moved to the open position by a single turn of the handle. Air is then directed under the open grate and into the heart of the fire, ensuring a clean, efficient burn.

INDEPENDENTLY CE TESTED AND APPROVED

All of the stoves in the Cleanburn range meet the stringent CE approval test requirements.

AIR WASH SYSTEM **KEEPS THE GLASS CLEAN**

Tripleburn® technology does the work for you. A secondary air wash maintains a stream of air between fuel and door, reducing the build-up of carbon deposits on the glass.

OPTIMUM WOODBURNING CONDITIONS*

The Tripleburn® technology improves the ignition of the fuel with a jet of air directed into the heart of the fire. When the grate is in the closed position creating a flat base, it allows a deep bed of ash to build-up - these are the optimum conditions for burning wood.

DESIGNED FOR AND TESTED UNDER THE INDEPENDENT TESTING STANDARDS

- / Tripleburn® technology
- Exceptionally hot air wash
- / Dust free, safe and easy riddling*
- / Multi-fuel grate system for burning wood or solid fuel*

www.gov.uk/government/ collections/approved-documents

^{*} Not applicable for the Strömstad or Nordstrand as they have fixed grates.

UNIDTH HEIGHT DEPTH

LØVENHOLM

470W 565H 360D 95KG










NØRRESKOVEN

510W 564H 400D 101KG






NØRRESKOVEN /EURO

510W 750H 376D 117KG


LØVENHOLM /EURO

470W 749H 335D 111KG










SØNDERSKOVEN


650W 725H 396D 145KG


590W 694H 404D 125KG












590W 694H 404D 125KG





STRÖMSTAD /RANGE

528W 700-993H 426D 106-125KG

35

NORDSTRAND /5 MODELS

586W 707H 446D 112KG





For full information on installation criteria, please refer to the instruction manual. These can be found on www.hunterstoves.co.uk or by contacting your dealer. All information in this brochure is correct at time of print. E&OE.





8 EMPEROR WAY EXETER DEVON EX1 3QS

INFO@HUNTERSTOVES.CO.UK WWW.HUNTERSTOVES.CO.UK









